


SOLENOID PUMPS

EBQ120

TECHNICAL DATA



DIMENSIONS

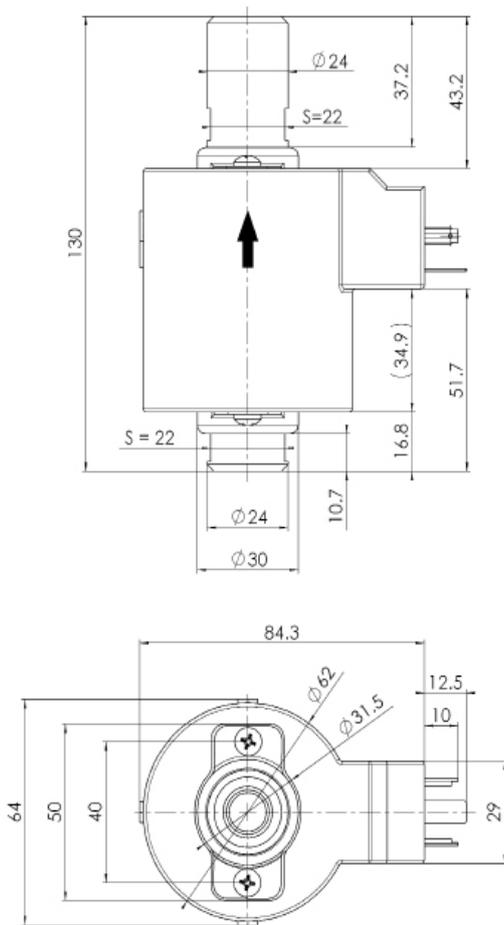

NOMINAL RATED DATA

Max. pressure	11.5[bar]
Max. flow rate	70[l/h]
Max. suction height	1.5[m]
Viscosity range	1...600[mm ² /s]
Filter	Mesh 100
Tension	230[V] (110V)
Frequency	50, 60[Hz]
Electrical connection	DIN 43650
Hydraulic connection	Internal G3/8" thread
Power	120[W]
Weight	~1110[g]
Temperature	1...50[°C]
Insulation	Class H Class 1
	100% ED / 20 [°C]


SOLENOID PUMPS

EBQ120 230V


TECHNICAL DATA



PERFORMANCES

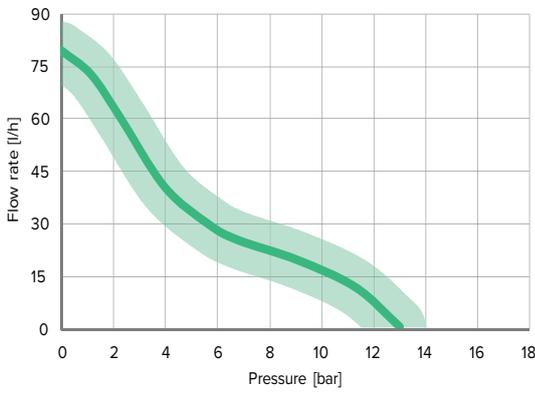

OPEN FLOW & TEMPERATURE

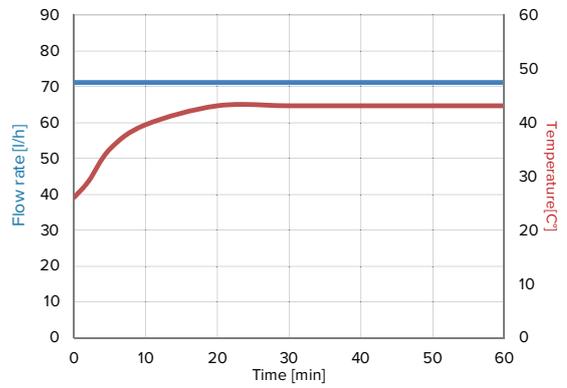

Tested with 20°C of water at ambient temperature


ACCESSORIES



Rubber mounting

Large choice of materials & options

ELECTRIC WIRING DIAGRAM

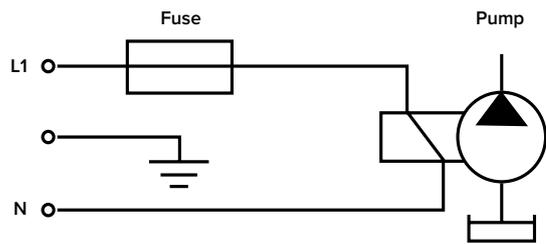

Please refer to instruction manual for more installation details. For more information, visit our website : www.gotec.ch

Certifications

