

40207



PRODUCT INFORMATION SHEET
MODEL: 8000-052-236

Model Number: 8000-052-236

Pump:

Positive Displacement 3 Chambers Diaphragm Pump

Upper Housing with 3/8"-18 NPT Female Ports

Bypass: No

Pressure Switch: Factory Set @ 60 PSI

2.5° Cam, Regular Diaphragm

Check Valve: Yes

Performances:

Open Flow: 2.3L/min (0.6GPM) +/- 10%

Test criteria: 19.2GPH min, 40PSI, 24VDC, 1.5A max

Maximum Inlet Pressure: 30 PSI

Run Dry: Yes

Material of construction:

Plastics (upper housing, piston cap, valve housing): Nylon

Valves: Viton®

Diaphragm: Viton®

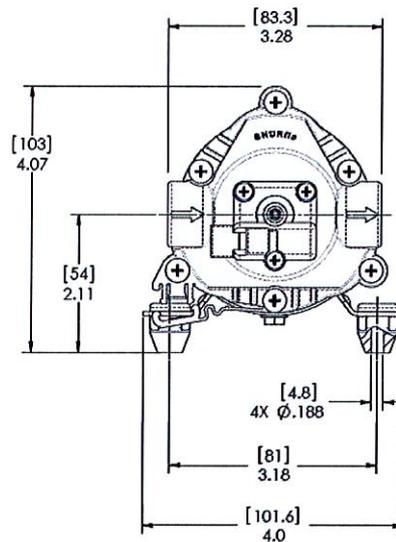
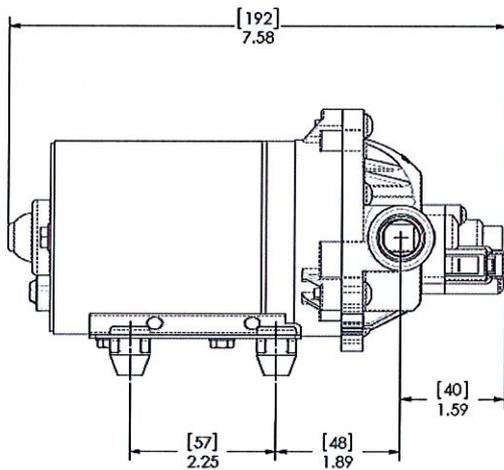
Electrical:

24VDC Nominal

Permanent Magnet Brush Motor

Motor Leads 16 AWG Wires

Duty cycle: Intermittent

DIMENSIONS:
Nominal dimensions shown in inches (mm).


Specifications subject to change without notice
 All data based on testing with water at ambient temperature

PENTAIR WATER BELGIUM bvba

Industriepark Wolfstee, Toekomstlaan 30, B-2200 Herentals, Belgium

TEL: +32-14-283 500 FAX: +32-14-283 505 email: shurflo@pentair.com